

**TYPE APPROVAL OF PACKAGING FOR
TRANSPORTATION OF DANGEROUS GOODS
CERTIFICATE NO.: NET0211D**


HOLDER OF CERTIFICATE:
Berry Norway Containers AS

MANUFACTURER: Berry Norway Containers AS, Brevikveien 535, N-1506 Moss, Norway

MARKING ON PACKAGING:

Each packaging intended for use according to the ADR shall bear markings which are durable, legible and placed in a location as to be readily visible. Letters, numerals and symbols shall be at least 6mm high. The packaging shall also be appropriately marked with the month of the manufacture. The period of use permitted for the carriage of dangerous substances shall be five years from the date of manufacture of the jerricans, except where a shorter period of use is prescribed because of the nature of the substance to be carried.

 **3H1/Y1.9/150/YR/N/NET0211D - ID**

-  : The United Nations symbol
- 3H1 : Plastics jerricans, non-removable head
- Y1.9 : Packaging group II and III, and relative density of the substance
- 150 : Hydraulic test pressure in kPa
- YR : To be replaced with the last two digits of the year of manufacture
- N : Norway, the state authorizing the allocation of the mark
- NET0211D - ID : Identification of the jerrican followed by "ID" to be replaced by the name or symbol of the manufacturer

PRODUCT:

Method of manufacture/ Description
Blow moulded jerrican performed in HDPE, details in report.



DIMENSIONS:

Weight of the jerrican, g	Volume, l / Min. wallthickness	L*W*H, mm	Neck size, mm	Drawing
1: 151 - 288	5 / 0.51	192*128*290	40	B - 30985
2: 181 - 288	5 / 0.61	192*128*290	40	B - 30985
3: 131 - 253	4 / 0.51	192*128*246	40	B - 30795B
4: 161 - 253	4 / 0.61	192*128*246	40	B - 30795B

5: 111 - 218	3 / 0.51	192*128*205	40	B - 30906
6: 141 - 218	3 / 0.61	192*128*205	40	B - 30906


MAXIMUM DEGREE OF FILLING IN LITER AT 15 °C, SHALL BE:

Initial boiling point in °C	< 60	>= 60 < 100	>= 100 < 200	>= 200 < 300	>= 300
Degree of filling in liter	4.9	5.0	5.1	5.2	5.3

CLOSING MECHANISM:

#: Closure type	Producer	Drawings	Material	Gasket	Torque
1: Screw cap	Modulpac AB	40 BPP/ 8400002	HDPE, details in report	PET/PE/ foamed EPE/PE/PET	5 Nm
2: Screw cap	Modulpac AB	40 PM/ 8400013	HDPE, details in report	Cone	5 Nm
3: Screw cap child resistant	Modulpac AB	40 PMP/ 8400017	HDPE, details in report	PP, details in report	5 Nm
4: Screw cap child resistant	Modulpac AB	40 PMF/ 8400028	HDPE, details in report	Cone sealing	5 Nm
5: Screw cap child resistant	Modulpac AB	40 BPP POM/ 8400002	POM/HDPE, details in report	PET/PE/ foamed EPE/PE/PET	5 Nm
6: Screw cap child resistant	Emballator Växjöplast AB	12445	MB7541 / MB7541	EPE/ALU	5 Nm
7: Screw cap child resistant	Emballator Växjöplast AB	12445	MB7541 / MB7541	EPE/PET	5 Nm



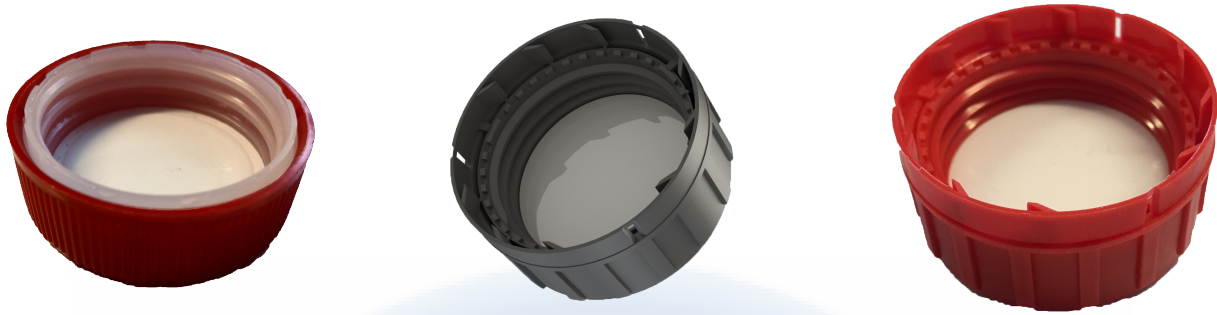

LEGISLATION:

The certificate is valid for a maximum of five years, provided no modifications have been made to the packaging design, materials, dimensions, closure system or manner of construction. To ensure validation of the certificate, check the NET website.

NET issues the certification on described product according to delegated authority from Norwegian Directorate for Civil Protection and Emergency Planning (DSB): Legal regulations for Transportation of Dangerous Goods on road and railway - 2023/4375 PRAX.

NET issues the certification on described product according to delegated authority from Norwegian Maritime Directorate (Sjøfartsdirektoratet) - 200705977-4/5367.1.

NET issues the certification on described product according to an agreement between Norwegian Civil Aviation Authority (Luftfartstilsynet) - 01.03.18 - 18/00114-8.

REGULATIONS BASED UPON FOR APPROVAL:

UN Recommendations on the Transport of Dangerous Goods.

ADR, European Agreement concerning the International Carriage of Dangerous Goods by Road.

RID, International Regulations on Transport of Dangerous Goods by Rail.

IMDG, International Maritime Dangerous Goods Code, for sea transport.

ICAO, Technical Instructions for the Safe Transport of Dangerous Goods by Air.

IATA, Dangerous Goods Regulations, for the air transport.

TESTS CARRIED OUT:

Prototype tests performed and approved according to the above regulations:

6.1.5.2.6 Chemical compatibility

6.1.5.3 Drop test

6.1.5.4 Leakproofness test

6.1.5.5 Internal pressure test

6.1.5.6 Stacking test

6.1.5.7 Supplementary permeability test

APPROVAL IS VALID FOR:

The packaging is valid for packaging group II and III containing liquid substances covered by the liquids listed in the table below. The liquids marked with letter A - F are referring to standard liquids listed in ADR 6.1.6.1 and verified by chemical compatibility testing, ADR 6.1.5.2.6, to this specific liquid.

The dangerous substances allowed to transport in the packaging after chemical compatibility with these liquids, are listed in the "Assimilation list" table 4.1.1.21.6 in ADR. Transport of the substance is only allowed if the approval of the standard liquid(S), covered by "Rule for collective entries", has the same or higher relative density as the substance to be transported.

The packaging shall always be used according to the requirements of the applicable UN-code and its packaging instructions.

Content	Max. relative density	Max. vapour pressure, kPa at +50°C	Packaging # / Screw cap #
Standard liquid A: Wetting Solution	1.2	143	2,4,6 / 1,2,3,4,5,7
Standard liquid B: Acetic Acid	1.1	120	1,3,5 / 1,2,3,4,5,6,7
Standard liquid C: n-Butyl acetate	1.0	120	1,3,5 / 1,2,3,4,5,7
Standard liquid D: Mixture of hydrocarbons	1.0	120	1,3,5 / 1,2,3,4,5,7
Standard liquid E: Acetic Acid	1.2	143	2,4,6 / 1,2,3,4,6,7
Standard liquid F: Water	1.9	143	1,3,5 / 1,2,3,4,5,7
Standars liquid G: Acetic Acid	1.1	143	1,3,5 / 4,6,7

DOCUMENTS BASED UPON FOR APPROVAL:

Report id.	Date	Issued by	Scope
NET0211D5	11.12.18	NET	Additional test, cap 7,8 W.s
NET0211D4	17.12.18	NET	Additional test, cap 7,8
NET02TE04	01.02.2012	NET	Technical evaluation, c.b
NET0211D	16.05.2012	NET	Type approval
99H60867A	08.09.1999	SP	Type approval
P002340	21.03.2000	SP	Type approval
P007624	14.09.2000	SP	Type approval
NET02T07	07.06.2012	NET	Type approval
NET0211C-1	04.09.2013	NET	Type approval
NET02POM40B	29.03.2017	NET	Additional cap, 6
NET2821A	23.03.2021	NET	Additional test, 40BPP POM
NET2817A	03.02.2021	NET	Additional test, 40PM
NET2823A	23.03.2021	NET	Additional test, 40BPP

VALIDITY:

The continued validity of the type approval requires that the holder of the certificate and/ or the manufacturer inform NET certification that has approved its type of packaging of any changes to the characteristics of the type or anything that can influence on the transport safety on the specific design so that it can be verified that the type of packaging continues to comply with packaging tested as base for the original type approval.

The validity of the type approval assume regular verification by means of periodic audits by NET in accordance with NET Doc 2: "Production control agreement". The packaging shall be manufactured, reconditioned and tested under a quality assurance program which satisfies NET Certification, in order to ensure that each packaging meets the requirements in ADR and the guidelines in ISO 16106.

TEST STANDARD:

All tests are performed in accordance with NET accredited test method ATM001. The test method is accredited in accordance with ISO17025 approved by Norsk Akkreditering and based upon ISO16495 and ISO13274.



BREVIK, NORWAY

25.10.2023 CERTIFICATE IS VALID UNTIL:**31.03.2026**

Mathias Werner
Certification Officer



Rune Madsen Fink
Control Officer

Nordisk Emballasje Testing Certification