

TYPE APPROVAL OF PACKAGING FOR TRANSPORTATION OF DANGEROUS GOODS CERTIFICATE NO.: NET1908M

HOLDER OF CERTIFICATE:

Accon FDP ApS

MANUFACTURER: Accon FDP ApS, Baldersbuen 8, DK-2640 Hedehusene, Denmark

MARKING ON PACKAGING:

Each packaging intended for use according to the ADR shall bear markings which are durable, legible and placed in a location as to be readily visible. Letters, numerals and symbols shall be at least 12 mm high.

(u) 1G/YKG/S/YR/N/NET1908M - ID

 $egin{pmatrix} \mathbf{u} \\ \mathbf{n} \end{pmatrix}$: The United Nations symbol

1G : Fibreboard drum

YKG : Packaging group II and III, and max gross mass in kg, se content table

S : Intended for carriage of solids, see content table

YR : To be replaced with the year (last two digits) of manufacture
N : Norway, the state authorizing the allocation of the mark

NET1908M - ID : Identification of the packaging followed by "ID" to be replaced by the name of the manufacturer

PRODUCT:

Description	Method of manufact	ure	Material		Drawing	
Fibre drum with	Spinning		6 layer of Kraftlin	er,	Type 2B-7, 01.05.13	
galvanized closing ring,			details in report			
reinforced in the top with						
galvanized steel and						
bottom in hard board						
with galvanized steel						



DIMENSIONS:

#: Volume, I	H*Ø, mm	Head/ Body/ Bottom, mm
1: 40 - 60	480 - 680 * 355	10 / 2.1 / 5.0
2: 30	370 * 355	10 / 2.1 / 5.0

Telephone +47 900 17025

E-mail: <u>info@net17025.com</u>

Web: <u>www.net17025.com</u>




CLOSING MECHANISM:

Closure type	Producer	Drawings	Material
Lid with lifting ring	Accon FDP ApS	Type 2B-7, 01.05.13	MDF, 10 mm
Locking ring, lever arm	Accon FDP ApS	Clamp, C620 REV.0 -	Galvanized steel: 1.2
and cotter pin		350 mm	mm / 0.6 mm



INNER PACKAGING:

PE plastic bag	Producer	Thickness at least,		Tear resistance at	Seal strengt at
		mm		least, MD/TD, N	least, N
Big enough to fold	Any	0.04		76/557	14.0
over the edge when					
filled, closed with a					
strip					
Cable tie	Any, minimum	-		-	-
	holding force 225 N				

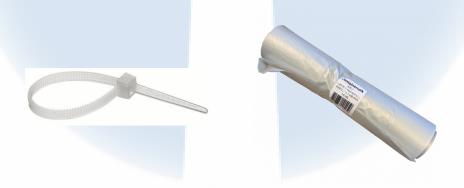

LEGISLATION:

The approval is valid for a maximum of five years, provided no modifications have been made to the packaging design, materials, dimensions, closure system or manner of construction. This certificate is liable to withdrawal at any time, to ensure validation check the published version on the Internet (www.net17025.com/Sertifisering/UN_ADR/cid/30758/).

NET issues the certification on described product according to delegated authority from Norwegian Directorate for Civil Protection and Emergency Planning (DSB): Legal regulations for Transportation of Dangerous Goods on road and railway - 06/6950-7/BJRU.

NET issues the certification on described product according to delegated authority from Norwegian Maritime Directorate (Sjøfartsdirektoratet) - 200705977-4/5367.1.

NET issues the certification on described product according to an agreement between Norwegian Civil Aviation Authority (Luftfartstilsynet) - 01.03.18 - 18/00114-8.

NET1908M Page 2 of 4

Telephone +47 900 17025
E-mail: <u>info@net17025.com</u>
Web: <u>www.net17025.com</u>



REGULATIONS BASED UPON FOR APPROVAL:

UN Recommendations on the Transport of Dangerous Goods.

ADR, European Agreement concerning the International Carriage of Dangerous Goods by Road.

RID, International Regulations on Transport of Dangerous Goods by Rail.

IMDG, International Maritime Dangerous Goods Code, for sea transport.

ICAO, Technical Instructions for the Safe Transport of Dangerous Goods by Air.

IATA, Dangerous Goods Regulations, for the air transport.

TESTS CARRIED OUT:

Prototype tests performed and approved according to the above regulations:

6.1.5.3 Drop test

6.1.5.6 Stacking test

APPROVAL IS VALID FOR:

The packaging is valid for transport containing substances that do not adversely affect the packaging materials. The packaging shall always be used according to the requirement of the applicable UN-code and its packaging instruction.

Content	Max. gross weight, kg		
1: Solids in a plastic bag	60		
2: Solids in a plastic bag	30		

DOCUMENTS BASED UPON FOR APPROVAL:

Report id.	Date	Issued by	Scope
NET1908M	23.02.2024	NET	Type Approval

VALIDITY:

The continued validity of the type approval requires that the holder of the certificate and/ or the manufacturer inform NET certification that has approved its type of packaging of any changes to the characteristics of the type or anything that can influence on the transport safety on the specific design so that it can be verified that the type of packaging continues to comply with packaging tested as base for the original type approval.

The validity of the type approval assume regular verification by means of periodic audits by NET in accordance with NET Doc 2: "Production control agreement". The packaging shall be manufactured, reconditioned and tested under a quality assurance program which satisfies NET Certification, in order to ensure that each packaging meets the requirements in ADR and the guidelines in ISO 16106.

TEST STANDARD:

All tests are performed in accordance with NET accredited test method ATM001. The test method is accredited in accordance with ISO17025 approved by Norsk Akkreditering and based upon ISO16495.



NET1908M Page 3 of 4

Telephone +47 900 17025
E-mail: <u>info@net17025.com</u>
Web: <u>www.net17025.com</u>





BREVIK, NORWAY

04.04.2024 CERTIFICATE IS VALID UNTIL:

30.04.2029

Mathias Werner Certification Officer Rune Madsen Fink Control Officer

Nordisk Emballasje Testing Certification

Pathiis Wemer

Telephone +47 900 17025 E-mail: <u>info@net17025.com</u> Web: <u>www.net17025.com</u>