

**TYPE APPROVAL OF PACKAGING FOR
TRANSPORTATION OF DANGEROUS GOODS
CERTIFICATE NO.: NET0211D**


HOLDER OF CERTIFICATE:
Berry Norway Containers AS

MANUFACTURER: Berry Norway Containers AS, Brevikveien 535, N-1506 Moss, Norway

MARKING ON PACKAGING:

Each packaging intended for use according to the ADR shall bear markings which are durable, legible and placed in a location as to be readily visible. Letters, numerals and symbols shall be at least 6mm high. The packaging shall also be appropriately marked with the month of the manufacture. The period of use permitted for the carriage of dangerous substances shall be five years from the date of manufacture of the jerricans, except where a shorter period of use is prescribed because of the nature of the substance to be carried.

 **3H1/Y1.9/150/YR/N/NET0211D - ID**

-  : The United Nations symbol
- 3H1 : Plastics jerricans, non-removable head
- Y1.9 : Packaging group II and III, and relative density of the substance
- 150 : Hydraulic test pressure in kPa
- YR : To be replaced with the last two digits of the year of manufacture
- N : Norway, the state authorizing the allocation of the mark
- NET0211D - ID : Identification of the jerrican followed by "ID" to be replaced by the name or symbol of the manufacturer

PRODUCT:

| |
|---|
| Method of manufacture/ Description |
| Blow moulded jerrican performed in HDPE, details in report. |



DIMENSIONS:

| Weight of the jerrican, g | Volume, l / Min. wallthickness | L*W*H, mm | Neck size, mm | Drawing |
|---------------------------|--------------------------------|-------------|---------------|------------|
| 1: 151 - 288 | 5 / 0.51 | 192*128*290 | 40 | B - 30985 |
| 2: 181 - 288 | 5 / 0.61 | 192*128*290 | 40 | B - 30985 |
| 3: 131 - 253 | 4 / 0.51 | 192*128*246 | 40 | B - 30795B |
| 4: 161 - 253 | 4 / 0.61 | 192*128*246 | 40 | B - 30795B |

| | | | | |
|--------------|----------|-------------|----|-----------|
| 5: 111 - 218 | 3 / 0.51 | 192*128*205 | 40 | B - 30906 |
| 6: 141 - 218 | 3 / 0.61 | 192*128*205 | 40 | B - 30906 |


MAXIMUM DEGREE OF FILLING IN LITER AT 15 °C, SHALL BE:

| | | | | | |
|-----------------------------|------|-------------|--------------|--------------|--------|
| Initial boiling point in °C | < 60 | >= 60 < 100 | >= 100 < 200 | >= 200 < 300 | >= 300 |
| Degree of filling in liter | 4.9 | 5.0 | 5.1 | 5.2 | 5.3 |

CLOSING MECHANISM:

| #: Closure type | Producer | Drawings | Material | Gasket | Torque |
|------------------------------|--------------------------|------------------------|-----------------------------|---------------------------|--------|
| 1: Screw cap | Modulpac AB | 40 BPP/ 8400002 | HDPE, details in report | PET/PE/ foamed EPE/PE/PET | 5 Nm |
| 2: Screw cap | Modulpac AB | 40 PM/ 8400013 | HDPE, details in report | Cone | 5 Nm |
| 3: Screw cap child resistant | Modulpac AB | 40 PMP/ 8400017 | HDPE, details in report | PP, details in report | 5 Nm |
| 4: Screw cap child resistant | Modulpac AB | 40 PMF/ 8400028 | HDPE, details in report | Cone sealing | 5 Nm |
| 5: Screw cap child resistant | Modulpac AB | 40 BPP POM/ 8400002 | POM/HDPE, details in report | PET/PE/ foamed EPE/PE/PET | 5 Nm |
| 6: Screw cap child resistant | Emballator Växjöplast AB | 12445 | MB7541 / MB7541 | EPE/ALU | 5 Nm |
| 7: Screw cap child resistant | Emballator Växjöplast AB | 12445 | MB7541 / MB7541 | EPE/PET | 5 Nm |

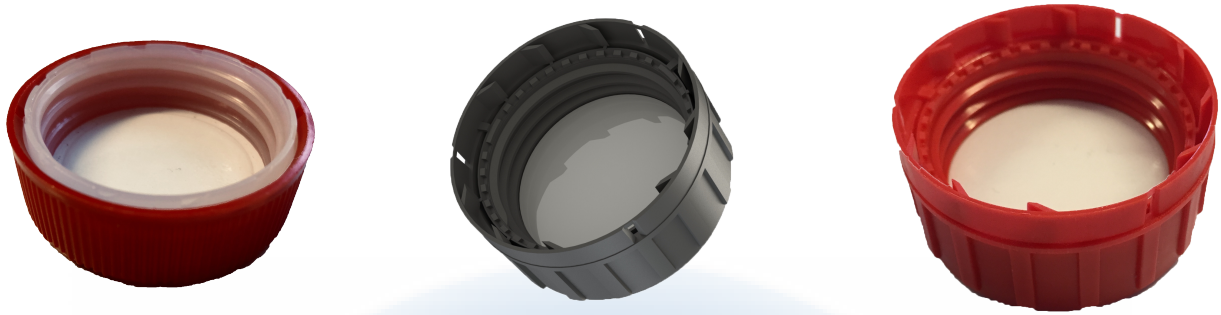

**LEGISLATION:**

NET issues this certification pursuant to delegated authority from the Norwegian Directorate for Civil Protection (DSB), in accordance with the Regulation of 1 April 2009 No. 384 on the land transport of dangerous goods, Chapter 6a (ref. 2023/4375 PRAX). NET is designated as the competent body for allocation of the UN mark on packagings, including IBCs and large packagings, as published by the United Nations (UNECE) list of competent authorities.

NET issues the certification on described product according to delegated authority from Norwegian Maritime Directorate (Sjøfartsdirektoratet) - 200705977-4/5367.1.

NET issues the certification on described product according to an agreement between Norwegian Civil Aviation Authority (Luftfartstilsynet) - 01.03.18 - 18/00114-8.

REGULATIONS BASED UPON FOR APPROVAL:

UN Recommendations on the Transport of Dangerous Goods.

ADR, European Agreement concerning the International Carriage of Dangerous Goods by Road.

RID, International Regulations on Transport of Dangerous Goods by Rail.

IMDG, International Maritime Dangerous Goods Code, for sea transport.

ICAO, Technical Instructions for the Safe Transport of Dangerous Goods by Air.

IATA, Dangerous Goods Regulations, for the air transport.

TESTS CARRIED OUT:

Prototype tests performed and approved according to the above regulations:

6.1.5.2.6 Chemical compatibility

6.1.5.3 Drop test

6.1.5.4 Leakproofness test

6.1.5.5 Internal pressure test

6.1.5.6 Stacking test

6.1.5.7 Supplementary permeability test

APPROVAL IS VALID FOR:

The packaging is valid for packaging group II and III containing liquid substances covered by the liquids listed in the table below. The liquids marked with letter A - F are referring to standard liquids listed in ADR 6.1.6.1 and verified by chemical compatibility testing, ADR 6.1.5.2.6, to this specific liquid.

The dangerous substances allowed to transport in the packaging after chemical compatibility with these liquids, are listed in the "Assimilation list" table 4.1.1.21.6 in ADR. Transport of the substance is only allowed if the approval of the standard liquid(S), covered by "Rule for collective entries", has the same or higher relative density as the substance to be transported.

The packaging shall always be used according to the requirements of the applicable UN-code and its packaging instructions.

Prior to reuse, all UN-approved packagings intended for the transport of dangerous goods shall be inspected to confirm that they remain free from damage, corrosion, and contamination. Compliance with the original ADR type approval, including all applicable prototype test performance criteria, must be ensured.

Packagings showing any sign of reduced mechanical integrity shall be subject to reconditioning, repair, or permanent withdrawal from service. All functional components - including closures, gaskets, and valves - must remain intact and fully operational to ensure continued conformity.

Packagings that no longer fulfill these requirements shall not be reused for the transport of dangerous goods, in accordance with ADR 4.1.1.9.

| Content | Max. relative density | Max. vapour pressure, kPa at +50°C | Packaging # / Screw cap # |
|--|-----------------------|------------------------------------|---------------------------|
| Standard liquid A: Wetting Solution | 1.2 | 143 | 2,4,6 / 1,2,3,4,5,7 |
| Standard liquid B: Acetic Acid | 1.1 | 120 | 1,3,5 / 1,2,3,4,5,6,7 |
| Standard liquid C: n-Butyl acetate | 1.0 | 120 | 1,3,5 / 1,2,3,4,5,7 |
| Standard liquid D: Mixture of hydrocarbons | 1.0 | 120 | 1,3,5 / 1,2,3,4,5,7 |
| Standard liquid E: Acetic Acid | 1.2 | 143 | 2,4,6 / 1,2,3,4,6,7 |
| Standard liquid F: Water | 1.9 | 143 | 1,3,5 / 1,2,3,4,5,7 |
| Standard liquid B: Acetic Acid | 1.1 | 143 | 1,3,5 / 4,6,7 |

DOCUMENTS BASED UPON FOR APPROVAL:

| Report id. | Date | Issued by | Scope |
|-------------|------------|-----------|------------------------------|
| NET0211D5 | 11.12.18 | NET | Additional test, cap 7,8 W.s |
| NET0211D4 | 17.12.18 | NET | Additional test, cap 7,8 |
| NET02TE04 | 01.02.2012 | NET | Technical evaluation, c.b |
| NET0211D | 16.05.2012 | NET | Type approval |
| 99H60867A | 08.09.1999 | SP | Type approval |
| P002340 | 21.03.2000 | SP | Type approval |
| P007624 | 14.09.2000 | SP | Type approval |
| NET02T07 | 07.06.2012 | NET | Type approval |
| NET0211C-1 | 04.09.2013 | NET | Type approval |
| NET02POM40B | 29.03.2017 | NET | Additional cap, 6 |

| | | | |
|----------|------------|-----|-------------------------------|
| NET2821A | 23.03.2021 | NET | Additional test, 40BPP POM |
| NET2817A | 03.02.2021 | NET | Additional test, 40PM |
| NET2823A | 23.03.2021 | NET | Additional test, 40BPP |

VALIDITY:

This approval is valid for five (5) years, provided no modifications are made to the packaging design, materials, dimensions, closure system, or method of construction.

The certificate may be withdrawn at any time.

The published version on www.net17025.com/Sertifisering/UN_ADR/cid/30758/ shall always be considered the valid one.

The certificate holder/manufacturer must notify NET Certification of any changes that may influence transport safety.

Continued validity requires periodic audits by NET in accordance with NET Doc 2: "Production control agreement".

The packaging shall be manufactured, reconditioned and tested under a quality assurance program meeting ADR requirements and guidelines in NS-EN ISO 16106:2020.

TEST STANDARD:

All tests are performed in accordance with NET accredited test method ATM001.

The test method is accredited in accordance with NS-EN ISO/IEC 17025:2017 approved by Norsk Akkreditering and according to NS-EN ISO 16495:2022 and NS-EN ISO 13274:2013.



BREVIK, NORWAY

24.03.2026 CERTIFICATE IS VALID UNTIL:

30.04.2031



Anita Gusfre Thoner
Certification Officer



Rune Madsen Fink
Control Officer

Nordisk Emballasje Testing Certification