

**TYPE APPROVAL OF PACKAGING FOR
TRANSPORTATION OF DANGEROUS GOODS
CERTIFICATE NO.: NET0204BX**

HOLDER OF CERTIFICATE:
Berry Norway Containers AS

MANUFACTURER: Berry Norway Containers AS, Brevikveien 535, N-1506 Moss, Norway

MARKING ON PACKAGING:

Each packaging intended for use according to the ADR shall bear markings which are durable, legible and placed in a location as to be readily visible. Letters, numerals and symbols shall be at least 6 mm High. The packaging shall also be appropriately marked with the month of the manufacture. The period of use permitted for the carriage of dangerous substances shall be five years from the date of manufacture of the drum, except where a shorter period of use is prescribed because of the nature of the substance to be carried.

Ⓢ 1H1/Y/250/YR/N/NET0204B - ID

- Ⓢ** : The United Nations symbol
- 1H1 : Plastics drums, non-removable head
- Y : Packaging group II and III, and relative density of the substance
- 250 : Hydraulic test pressure in kPa
- YR : To be replaced with the last two digits of the year of manufacture
- N : Norway, the state authorizing the allocation of the mark
- NET0204B - ID : Identification of the jerrican followed by "ID" to be replaced by the name or symbol of the manufacturer

PRODUCT:

Method of manufacture/ Description/ Min. wall thickness
Blow moulded bottle/ 1.0 L drum performed in HDPE, details in report. Min. wall thickness 0.3 mm.



DIMENSIONS:


Weight of the drum, g	Volume, l	H*Ø, mm	Neck size, mm	Drawing
35	1.0	252*82	28	9003/B-30389 9029/B-30512

MAXIMUM DEGREE OF FILLING IN LITER AT 15 °C, SHALL BE:

Initial boiling point in °C	< 60	>= 60 < 100	>= 100 < 200	>= 200 < 300	>= 300
Degree of filling in liter	0.9	0.9	0.9	1.0	1.0

CLOSING MECHANISM:

#: Screw cap	Producer	Drawings	Material	Gasket	Torque
1: 28 mm child resistant	Modulpac AB	28BPP/82800013	HDPE, details in report	PET / ALKOzell / PET	2 Nm
2: 28 mm child resistant	ERACO	28-586	HDPE inner and PP outer	Cone	2 Nm
3: 28 mm child resistant	Modulpac AB	28BPOM/8280006	POM details in report	Cone	2 Nm
4: 28 mm child resistant	Modulpac AB	28BIPETSPCO/8280038	HDPE / LLDPE, details in report	Cone	2 Nm
5: 28 mm cap child resistant	Modulpac AB	28B/ 8280014	POM inner PP outer	Cone	2 Nm
6: 28 mm child resistant	Emballator Växjöplast AB	S 28-886POM 00-127	POM inner and PP outer	Cone	2 Nm
7: 28 mm child resistant	Emballator Växjöplast AB	12492	POM inner and PP outer	Cone	2 Nm

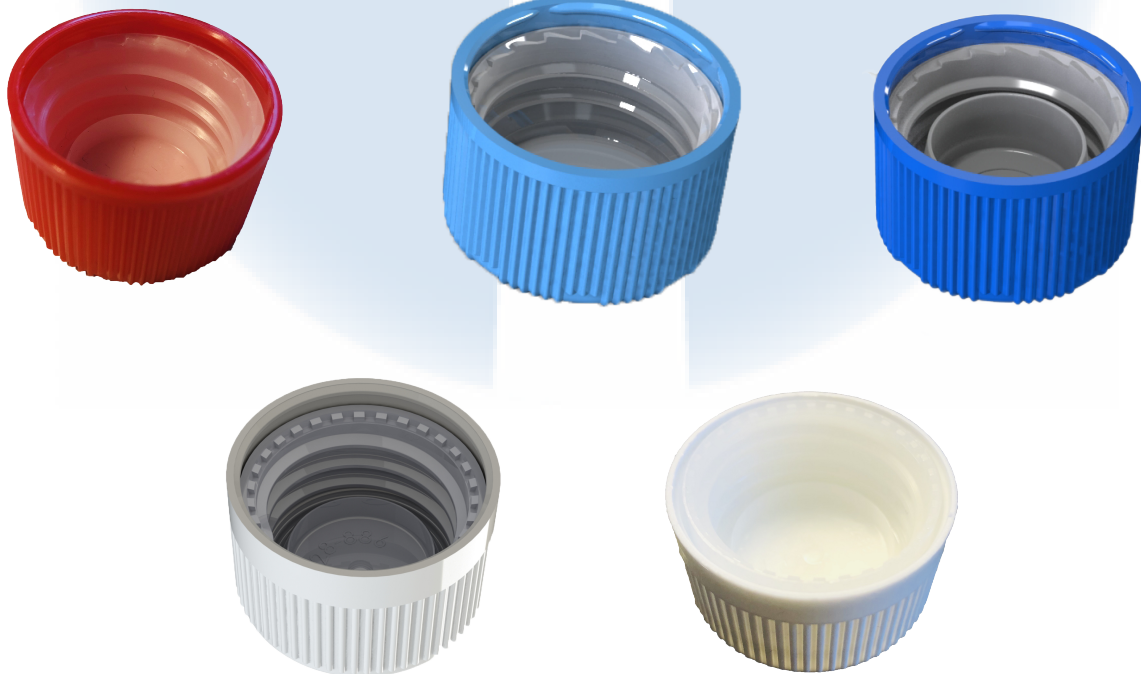

LEGISLATION:

NET issues this certification pursuant to delegated authority from the Norwegian Directorate for Civil Protection (DSB), in accordance with the Regulation of 1 April 2009 No. 384 on the land transport of dangerous goods, Chapter 6a (ref. 2023/4375 PRAX). NET is designated as the competent body for allocation of the UN mark on packagings, including IBCs and large packagings, as published by the United Nations (UNECE) list of competent authorities.

NET issues the certification on described product according to delegated authority from Norwegian Maritime Directorate (Sjøfartsdirektoratet) - 200705977-4/5367.1.

NET issues the certification on described product according to an agreement between Norwegian Civil Aviation Authority (Luftfartstilsynet) - 01.03.18 - 18/00114-8.

REGULATORY BASIS FOR APPROVAL:

UN Recommendations on the Transport of Dangerous Goods.

ADR, European Agreement concerning the International Carriage of Dangerous Goods by Road.

RID, International Regulations on Transport of Dangerous Goods by Rail.

IMDG, International Maritime Dangerous Goods Code, for sea transport.

ICAO, Technical Instructions for the Safe Transport of Dangerous Goods by Air.

IATA, Dangerous Goods Regulations, for the air transport.

TESTS CARRIED OUT:

Prototype tests performed and approved according to the above regulations:

6.1.5.2.6 Chemical compatibility

6.1.5.3 Drop test

6.1.5.4 Leakproofness test

6.1.5.5 Internal pressure test

6.1.5.6 Stacking test

6.1.5.7 Supplementary permeability test

APPROVAL IS VALID FOR:

The packaging is approved for packaging group II and III for the specific liquid substances listed in the table below, subject to the stated maximum relative density, maximum vapour pressure and specified packaging components.

The packaging shall always be used according to the requirements of the applicable UN-code and its packaging instructions.

Content	Max. relative density	Max. vapour pressure, kPa at +50°C	Packaging # / Screw cap #
Terpentine substitute, UN1300	1.0	200	II and III
Gasoline, UN1203	1.0	200	II and III
Diesel fuel, UN1202	1.0	200	III

DOCUMENTS BASED UPON FOR APPROVAL:

Report id.	Date	Issued by	Scope
NET0204BX	31.12.18	NET	Type approval
NET0204By2	15.03.16	NET	Additional test, new cap
NET16T03	29.12.16	NET	Additional test, cap #7
NET2819A	08.01.21	NET	Additional test, 28B POM
NET2820A	08.01.21	NET	Additional test, 28B
NET2826A	23.03.21	NET	Additional test, 28BPP
NET2829A	23.03.21	NET	Additional test, 28BIPETSPCO

VALIDITY:

This approval is valid for five (5) years, provided no modifications are made to the packaging design, materials, dimensions, closure system, or method of construction.

The certificate may be withdrawn at any time.

The published version on www.net17025.com/Sertifisering/UN_ADR/cid/30758/ shall always be considered the valid one.

The certificate holder/manufacturer must notify NET Certification of any changes that may influence transport safety.

Continued validity requires periodic audits by NET in accordance with NET Doc 2: "Production control agreement".

The packaging shall be manufactured, reconditioned and tested under a quality assurance programme meeting ADR requirements and guidelines in NS-EN ISO 16106:2020.

TEST STANDARD:

All tests are performed in accordance with NET accredited test method ATM001. The test method is accredited in accordance with NS-EN ISO/IEC 17025:2017 approved by Norsk Akkreditering and according to NS-EN ISO 16495:2022 and NS-EN ISO 13274:2013.



BREVIK, NORWAY

19.05.2026 CERTIFICATE IS VALID UNTIL:

31.05.2031



Mathias Werner
Certification Officer



Rune Madsen Fink
Control Officer

Nordisk Emballasje Testing Certification