

# TYPE APPROVAL OF PACKAGING FOR TRANSPORTATION OF DANGEROUS GOODS CERTIFICATE NO.: NET7909A

HOLDER OF CERTIFICATE:  
**Dolav Plastic Products Ltd.**

1089 kg max

**MANUFACTURER:** Dolav Plastic Products Ltd., Kibbutz Dvir 8533000, Israel

## **MARKING ON PACKAGING:**

All packagings intended for use under ADR shall bear markings that are durable, clearly legible, and positioned in a location where they are readily visible. The minimum height for letters, numerals, and symbols is 12 mm. In addition, each IBC shall be marked with the maximum permitted stacking load, in accordance with ADR 6.5.2.2.1 (refer to the figure on the right).




① **11H2/Y/MMYY/N/NET7909A - ID/1960/544**

|               |                                                                                                       |
|---------------|-------------------------------------------------------------------------------------------------------|
| ①             | : The United Nations symbol                                                                           |
| 11H2          | : Rigid plastics IBCs, freestanding, for solids                                                       |
| Y             | : Packaging group II and III                                                                          |
| MMYY          | : To be replaced with the month and year (last two digits) of manufacture                             |
| N             | : Norway, the state authorizing the allocation of the mark                                            |
| NET7909A - ID | : Identification of the IBC followed by "ID" to be replaced by the name or symbol of the manufacturer |
| 1960          | : Stacking test load in kg                                                                            |
| 544           | : Maximum gross mass in kg                                                                            |

## **PRODUCT:**

| Description/ Method of manufacture                                             | Drawing    |
|--------------------------------------------------------------------------------|------------|
| Rectangular rigid plastic container injection moulded in HDPE structural foam. | 2400300000 |

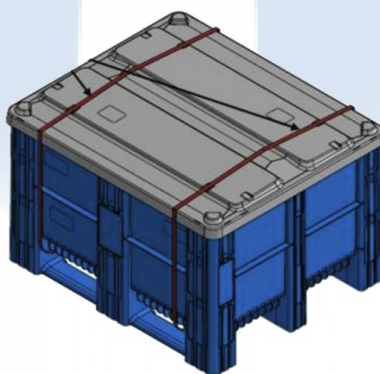

## **DIMENSIONS:**

| Capacity, l | External dimensions: L*W*H, mm | Internal dimensions: L*W*H, mm |
|-------------|--------------------------------|--------------------------------|
| 605         | 1200*1000*740                  | 1128*928*585                   |

## **CLOSING MECHANISM:**

| Closure type                                                                                                                                     |
|--------------------------------------------------------------------------------------------------------------------------------------------------|
| Separate lid, type 1000 Universal, secured by two 19 mm polypropylene straps. For transport, the lid shall be fitted and secured by both straps. |

#### LEGISLATION:

NET issues this certification pursuant to delegated authority from the Norwegian Directorate for Civil Protection (DSB), in accordance with the Regulation of 1 April 2009 No. 384 on the land transport of dangerous goods, Chapter 6a (ref. 2023/4375 PRAX). NET is designated as the competent body for allocation of the UN mark on packagings, including IBCs and large packagings, as published by the United Nations (UNECE) list of competent authorities.

NET issues the certification on described product according to delegated authority from Norwegian Maritime Directorate (Sjøfartsdirektoratet) - 200705977-4/5367.1.

NET issues the certification on described product according to an agreement between Norwegian Civil Aviation Authority (Luftfartstilsynet) - 01.03.18 - 18/00114-8.

#### REGULATORY BASIS FOR APPROVAL:

UN Recommendations on the Transport of Dangerous Goods.

ADR, European Agreement concerning the International Carriage of Dangerous Goods by Road.

RID, International Regulations on Transport of Dangerous Goods by Rail.

IMDG, International Maritime Dangerous Goods Code, for sea transport.

ICAO, Technical Instructions for the Safe Transport of Dangerous Goods by Air.

IATA, Dangerous Goods Regulations, for the air transport.

#### TESTS CARRIED OUT:

Prototype tests have been performed and approved in accordance with the above regulations.

6.5.6.4 Bottom lift test

6.5.6.6 Stacking test

6.5.6.9 Drop test

#### APPROVAL IS VALID FOR:

The IBC shall always be used in accordance with the requirements of the applicable UN code and corresponding packaging instruction. The contents must not adversely affect the packaging materials.

Prior to reuse, all UN-approved packagings intended for the transport of dangerous goods shall be inspected to confirm that they remain free from damage, corrosion, and contamination. Compliance with the original ADR type approval, including all applicable prototype test performance criteria, must be ensured.

Packagings showing any sign of reduced mechanical integrity shall be subject to reconditioning, repair, or permanent withdrawal from service. All functional components - including closures, gaskets, and valves - must remain intact and fully operational to ensure continued conformity.

Packagings that no longer fulfil these requirements shall not be reused for the transport of dangerous goods, in accordance with ADR 4.1.1.9.

Approved content

Solid substances that do not adversely affect the packaging materials

#### DOCUMENTS BASED UPON FOR APPROVAL:

| Report id.   | Date       | Issued by                                                              | Scope         |
|--------------|------------|------------------------------------------------------------------------|---------------|
| 7613211166/1 | 28.05.2026 | The Standards Institution of Israel, Mechanics & Hydraulics Laboratory | Type approval |

**VALIDITY:**

This approval is valid for five (5) years, provided no modifications are made to the packaging design, materials, dimensions, closure system, or method of construction.

The certificate may be withdrawn at any time.

The published version on [www.net17025.com/Sertifisering/UN\\_ADR/cid/30758/](http://www.net17025.com/Sertifisering/UN_ADR/cid/30758/) shall always be considered the valid one.

The certificate holder/manufacturer must notify NET Certification of any changes that may influence transport safety.

Continued validity requires periodic audits by NET in accordance with NET Doc 2: "Production control agreement".

The packaging shall be manufactured, reconditioned and tested under a quality assurance programme meeting ADR requirements and guidelines in NS-EN ISO 16106:2020.

BREVIK, NORWAY

**11.08.2026**

CERTIFICATE IS VALID UNTIL:

**31.08.2031**


Anita Gusfre Thoner  
Certification Officer



Rune Madsen Fink  
Control Officer

*Nordisk Emballasje Testing Certification*