



# PRODUCT APPROVAL OF PACKAGING FOR TRANSPORTATION OF DANGEROUS GOODS CERTIFICATE NO.: NETO211C

**HOLDER OF CERTIFICATE:** 

# **Berry Packaging Norway AS, Kambo**

MANUFACTURER: Berry Packaging Norway AS, Kambo, Boks 3054, N-1506 Moss,

Norway

MARKING ON PACKAGING: (2) 3H1/Y1.9/150/YR/N/NET0211C - ID

or "3H1/1.9/150/YR/N/NET0211C - ID"

This marking without the "Y" for packaging group II is placed on this jerrycans with production date until 25.01.2018, due to a engraving error.

The packaging shall also be appropriately marked with the month of the manufacture.

## **PRODUCT:**

Packaging code	Description	Drawing	Material
3H1, 5 L	Plastics jerricans,	B-30985 (9433 220313)	HDPE, details in report
	non-removable head		
3H1, 4 L	Plastics jerricans,	B-30795B (9434)	HDPE, details in report
	non-removable head		
3H1, 3 L	Plastics jerricans,	B-30906 (9456)	HDPE, details in report
	non-removable head		



# **CLOSING MECHANISM:**

#: Screw cap	Producer	Drawings	Material	Gasket	Torque
1: 40 mm, child	Modulpac AB	8400002	HYA600 /	PET/Alkozell	5 Nm
resistant			HMA025		
2: 40 mm	Modulpac AB	8400012	HYA600	Cone sealing	10 Nm

Telephone +47 900 17025
E-mail: <u>info@net17025.com</u>
Web: <u>www.net17025.com</u>

VAT No.: 990 793 840 Bank account: 6250.05.22351 GPS: 59°03'25" N 9°40'70" E


<sup>&</sup>quot;YR" to be replaced with the two last digits of the year.

<sup>&</sup>quot;ID" to be replaced by any identification as decided by the manufacturer.





4: 40 mm	Modulpac AB	7400009	HYA600	Expanded PE	6 Nm
5: 40 mm	Modulpac AB	8400015	Marlex 5502BN	Cone sealing	6 Nm
6: 40 mm, child	Modulpac AB	8400002	POM C9N /	PET/Alkozell/	5 Nm
resistant			HMA025	PET	
7: 40 mm, child	Emballator	12445	MB7541/	EPE/ALU	5 Nm
resistant	Växjöplast AB		MB7541		
8: 40 mm, child	Emballator	12445	MB7541/	EPE/PET	5 Nm
resistant	Växjöplast AB		MB7541		

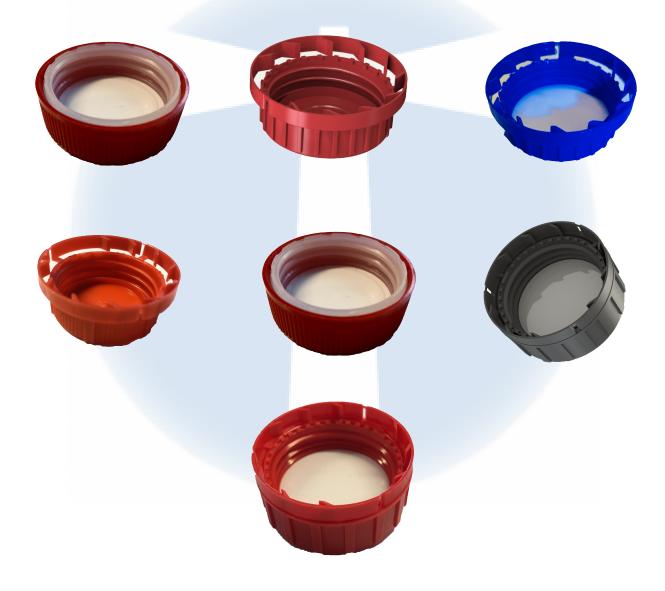

 NET0211C
 Page 2 of 4

 Telephone
 +47 900 17025

 E-mail:
 info@net17025.com

 Web:
 www.net17025.com

VAT No.: 990 793 840 Bank account: 6250.05.22351 GPS: 59°03'25" N 9°40'70" E



#### **DIMENSIONS:**

#: Weight of	Volume, I	Length, mm	Width, mm	Height, mm	Neck size, mm
jerrican, g					
1: 150 - 275	5.0	192	128	290	40
2: 180 - 275	5.0	192	128	290	40
3: 130 - 240	4.0	192	128	246	40
4: 160 - 240	4.0	192	128	246	40
5: 110 - 205	3.0	192	128	205	40
6: 140 - 205	3.0	192	128	205	40

#### APPROVAL:

The certificate is valid for a maximum of five years, provided no modifications have been made to the packaging design, materials, dimensions, closure system or manner of construction. To ensure validation of the certificate, check the NET website.

NET issues the certification on described product according to delegated authority from Norwegian Directorate for Civil Protection and Emergency Planning (DSB): Legal regulations for Transportation of Dangerous Goods on road and railway - 06/6950-7/BJRU.

NET issues the certification on described product according to delegated authority from Norwegian Maritime Directorate (Sjøfartsdirektoratet) - 200705977-4/5367.1.

NET issues the certification on described product according to an agreement between Norwegian Civil Aviation Authority (Luftfartstilsynet) - 01.03.18 - 18/00114-8.

#### **REGULATIONS BASED UPON FOR APPROVAL:**

UN Recommendations on the Transport of Dangerous Goods.

ADR, European Agreement concerning the International Carriage of Dangerous Goods by Road.

RID, International Regulations on Transport of Dangerous Goods by Rail.

IMDG, International Maritime Dangerous Goods Code, for sea transport.

ICAO, Technical Instructions for the Safe Transport of Dangerous Goods by Air.

IATA, Dangerous Goods Regulations, for the air transport.

## **APPROVAL IS VALID FOR:**

The packaging is valid for packaging group II and III containing liquid substances that do not adversely affect the packaging materials. Permeability test has been carried out according to ADR 6.1.5.7. Compatibility testing has been carried out according to ADR/RID with the content listed below:

Content (standard liquid)	Max. relative density	Jerrican #	Screw cap #	Max. vapour pressure, kPa at +50°C
Water	1.9	1, 3, 5	1, 2, 3, 4, 7, 8	143
n-Butyl acetate	1.0	1, 3, 5	1, 2, 3, 4, 7, 8	143
Mixture of	1.0	1, 3, 5	1, 2, 3, 4, 6, 7, 8	143
hydrocarbons				
Acetic acid	1.1	1, 3, 5	1, 2, 3, 4, 5, 7, 8	143
Wetting solution	1.2	2, 4, 6	1, 2, 3, 4, 7, 8	143
Acetic acid	1.2	2, 4, 6	1, 2, 3, 4, 7, 8	143

#### **DOCUMENTS BASED UPON FOR APPROVAL:**

Report id.	Date	Issued by	Scope
99H60867A	08.09.1999	SP	Type testing
P002340	21.03.2000	SP	Type testing
P007624	14.09.2000	SP	Type testing

Telephone +47 900 17025
E-mail: <u>info@net17025.com</u>
Web: <u>www.net17025.com</u>

VAT No.: 990 793 840 Bank account: 6250.05.22351 GPS: 59°03'25" N 9°40'70" E





NET0205C	08.01.2009	NET	Type testing
NET02TE04	01.02.2012	NET	Technical evaluation, c.b.
NET02T07	07.06.2012	NET	Type testing
NET0211C-1	04.09.2013	NET	Type testing
NET28POM40B	29.03.2017	NET	Additional test, cap 6
NET0211D4	17.12.2018	NET	Additional test, cap 7,8
NET0211D5	11.12.2018	NET	Additional test, cap 7,8
			W.s.

#### **TEST STANDARD:**

All tests are performed in accordance with NET accredited test method ATM001. The test method is accredited in accordance with ISO17025 approved by Norsk Akkreditering and based upon ISO16495 and ISO13274.



PORSGRUNN, NORWAY

Gai M. Johan

**28.04.2020** CERTIFICATE IS VALID UNTIL:

Rune Madsen Fink

Control Officer

30.04.2025

VAT No.: 990 793 840

Bank account: 6250.05.22351

GPS: 59°03'25" N 9°40'70" E

Geir Morten Johansen Certification Officer

Nordisk Emballasje Testing AS Certification

NET0211C Page 4 of 4

Telephone +47 900 17025

E-mail: info@net17025.com

Web: www.net17025.com