




PRODUCT APPROVAL OF PACKAGING FOR TRANSPORTATION OF DANGEROUS GOODS CERTIFICATE NO.: NET0230C

HOLDER OF CERTIFICATE:
RPC Promens AS, Kambo

MANUFACTURER: RPC Promens AS, Kambo, Boks 3054, N-1506 Moss, Norway

MARKING ON PACKAGING:  **1H1/Y1.9/150/YR/N/NET0230C - ID**

"YR" to be replaced with the two last digits of the year.

"ID" to be replaced by any identification as decided by the manufacturer.


The packaging shall also be appropriately marked with the month of the manufacture.

PRODUCT:

Packaging code / volume	Description	Drawings	Material
1H1, 1 L	Plastics drums, non-removable head	B-30981 / 9339	Marlex HXM 50100

CLOSING MECHANISM:

#: Closure type	Producer	Drawings	Material	Gasket	Torque
1: Screw cap	Modulpac AB	8320014 rev.3	HDPE, details in report	none, cone	3 Nm

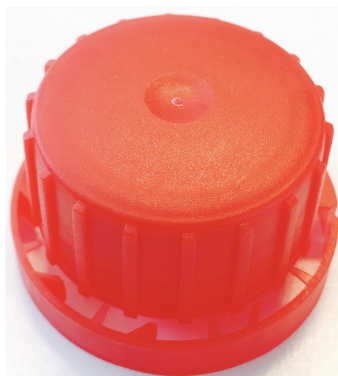

DIMENSIONS:

Packaging weight, g	Volume, l	Height, mm	Diameter, mm	Neck size, mm
46.7 - 79.9	1.0	256.5	83.5	32

APPROVAL:

The certificate is valid for a maximum of five years, provided no modifications have been made to the packaging design, materials, dimensions, closure system or manner of construction. To ensure validation of the certificate, check the NET website.

NET issues the certification on described product according to delegated authority from Norwegian Directorate for Civil Protection and Emergency Planning (DSB): Legal regulations for Transportation of Dangerous Goods on road and railway - 06/6950-7/BJRU.

REGULATIONS BASED UPON FOR APPROVAL:

UN Recommendations on the Transport of Dangerous Goods.

ADR, European Agreement concerning the International Carriage of Dangerous Goods by Road.

RID, International Regulations on Transport of Dangerous Goods by Rail.

IMDG, International Maritime Dangerous Goods Code, for sea transport.

ICAO, Technical Instructions for the Safe Transport of Dangerous Goods by Air.

IATA, Dangerous Goods Regulations, for the air transport.

APPROVAL IS VALID FOR:

The packaging is valid for packaging group II and III containing liquid substances that are covered by the standard liquid listed in the table below and the assimilation list in ADR 4.1.1.21.6. Permeability test has been carried out according to ADR 6.1.5.7.

Content	Max. relative density	Max. vapour pressure, kPa at +50°C
Water	1.9	142
Wetting solution	1.2	142
Acetic acid	1.1	142
n-Butyl acetate	1.0	142
White spirit	1.0	142

DOCUMENTS BASED UPON FOR APPROVAL:

Report id.	Date	Issued by	Scope
NET0230C	19.07.2017	NET	Type approval
NET0212C	17.08.2017	NET	Additional type test, increased weight

PORSGRUNN, NORWAY

21.08.2017 CERTIFICATE IS VALID UNTIL:

31.08.2022

A handwritten signature in blue ink, reading 'Geir M. Johansen'.

Geir Morten Johansen
Certification Officer

A handwritten signature in blue ink, reading 'Rune Madsen Fink'.

Rune Madsen Fink
Control Officer

Nordisk Emballasje Testing AS Certification